



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #106
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM69CW-433S2(10dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3V
Date: 2013/11/18
Time: 14:57:49
Engineer Signature: PEI
Distance: 3m

Note:

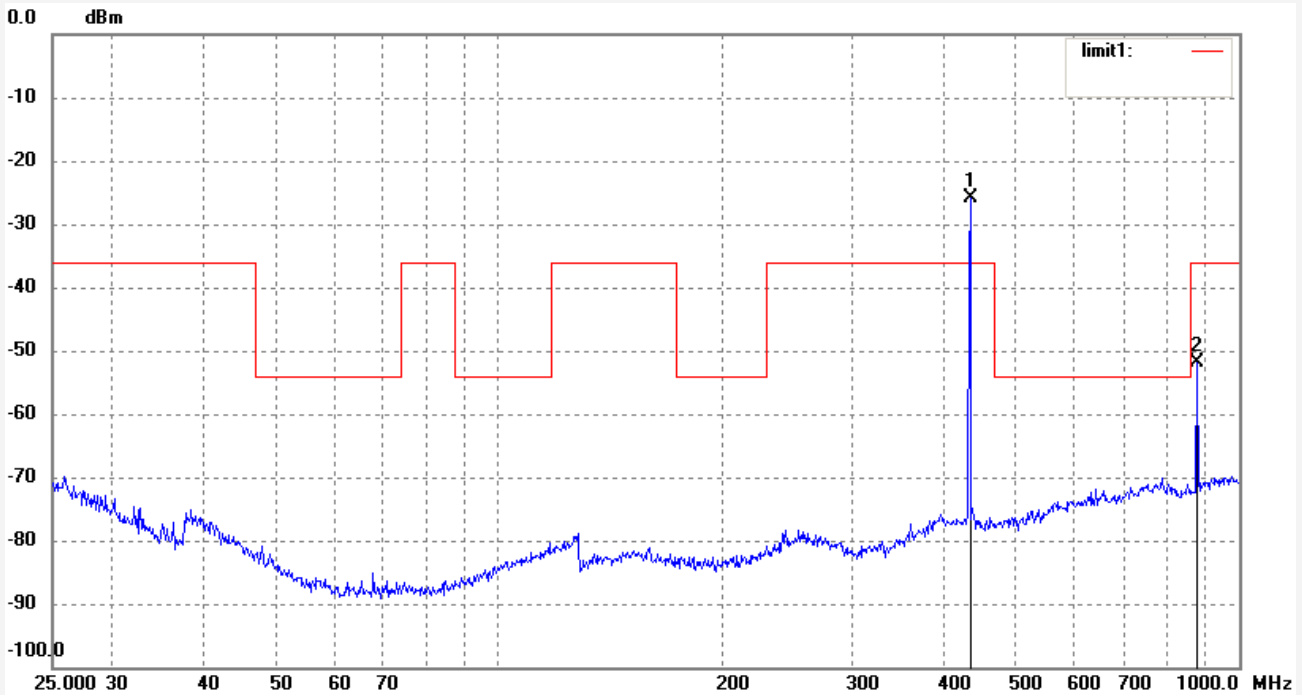

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.7194	-28.96	3.00	-25.96	-36.00	10.04	peak			
2	868.6490	-60.45	8.63	-51.82	-36.00	-15.82	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #107
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM69CW-433S2(10dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3V
Date: 2013/11/18
Time: 14:58:49
Engineer Signature: PEI
Distance: 3m

Note:

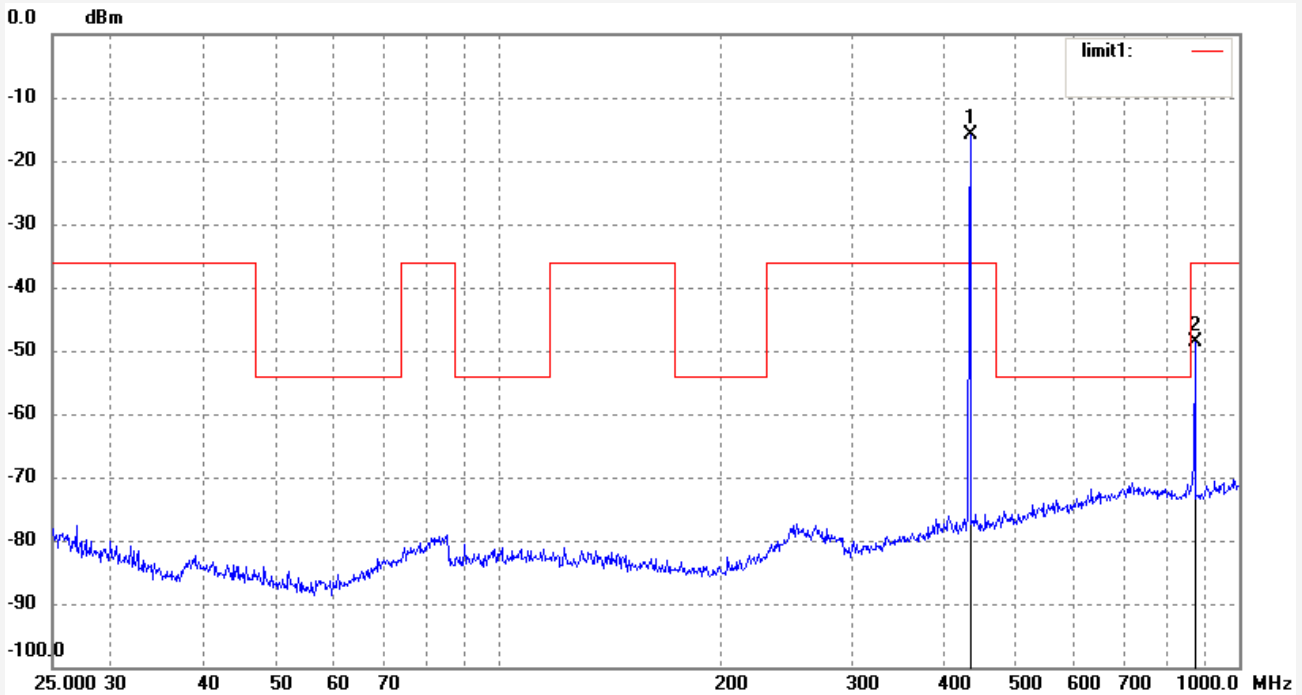

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.7194	-18.07	2.16	-15.91	-36.00	20.09	peak			
2	868.1776	-56.70	8.08	-48.62	-36.00	-12.62	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #154
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM69CW-433S2(10dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3V
Date: 2013/11/18
Time: 17:10:23
Engineer Signature: PEI
Distance: 3m

Note:

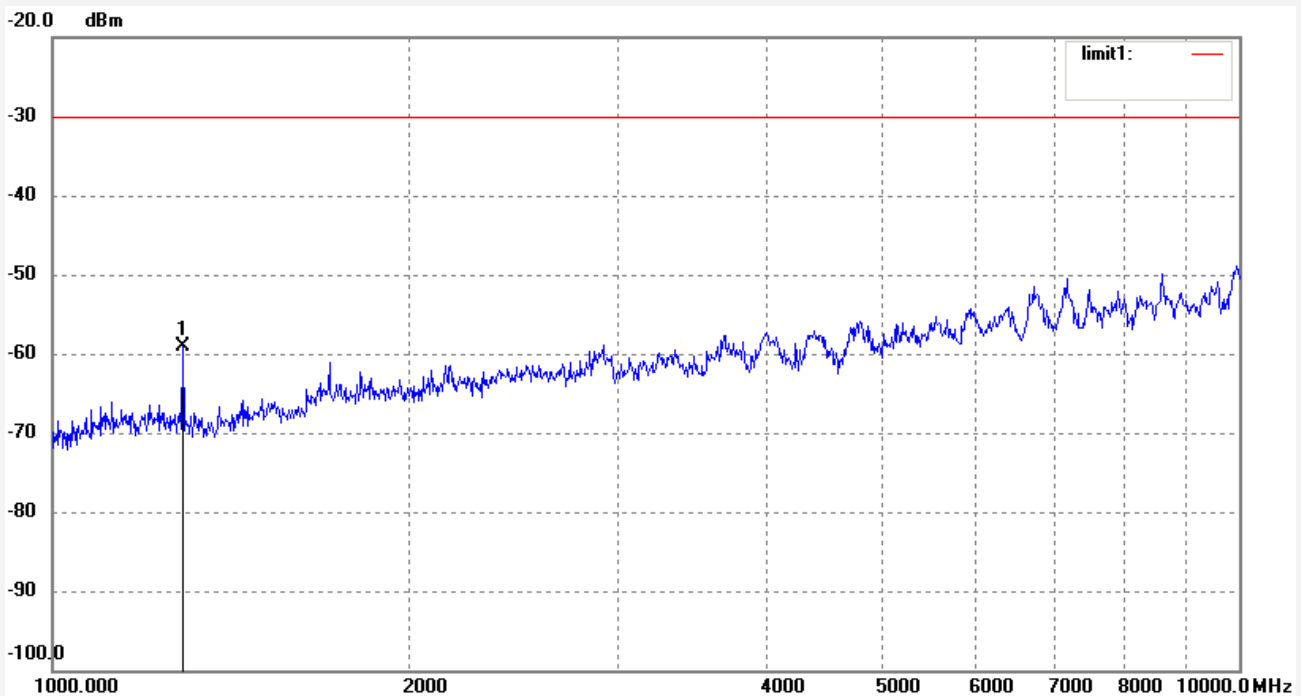

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1299.000	-55.81	-3.34	-59.15	-30.00	-29.15	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #155
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM69CW-433S2(10dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3V
Date: 2013/11/18
Time: 17:11:44
Engineer Signature: PEI
Distance: 3m

Note:

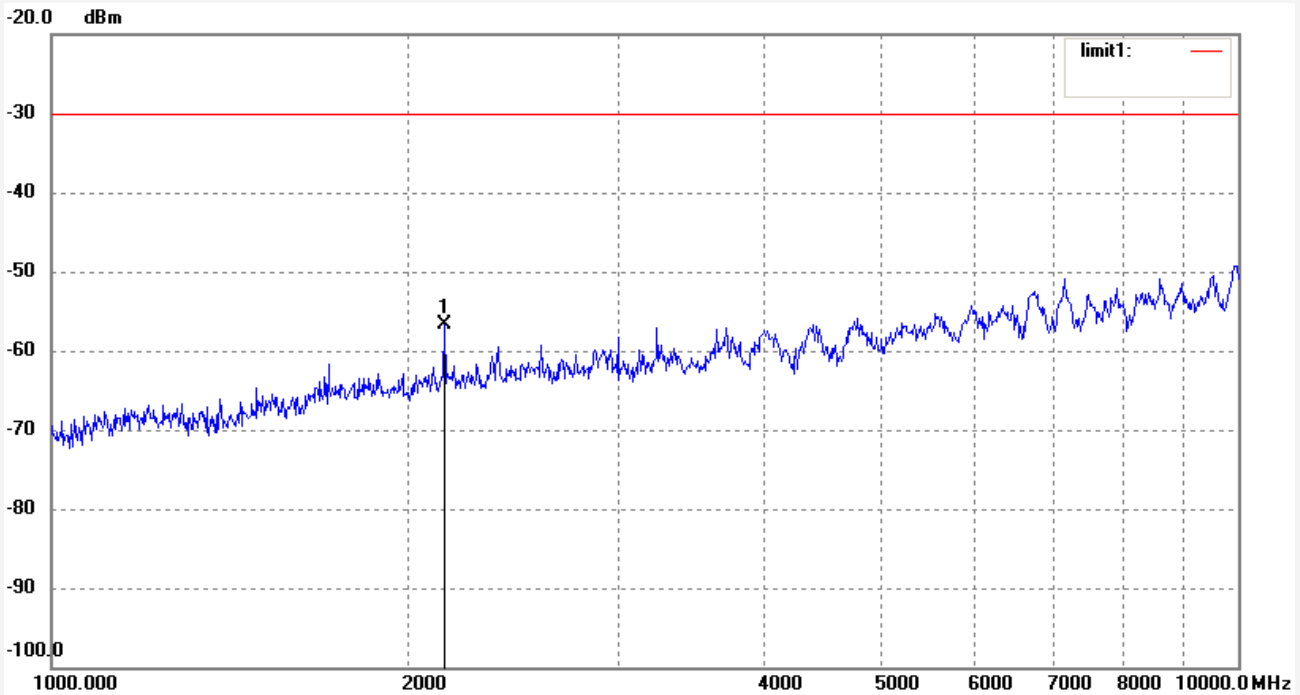

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2165.000	-57.42	0.72	-56.70	-30.00	-26.70	peak			