



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #94  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: RFM69CW-433S2(0dBm)  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3V  
Date: 2013/11/18  
Time: 14:32:08  
Engineer Signature: PEI  
Distance: 3m

Note:

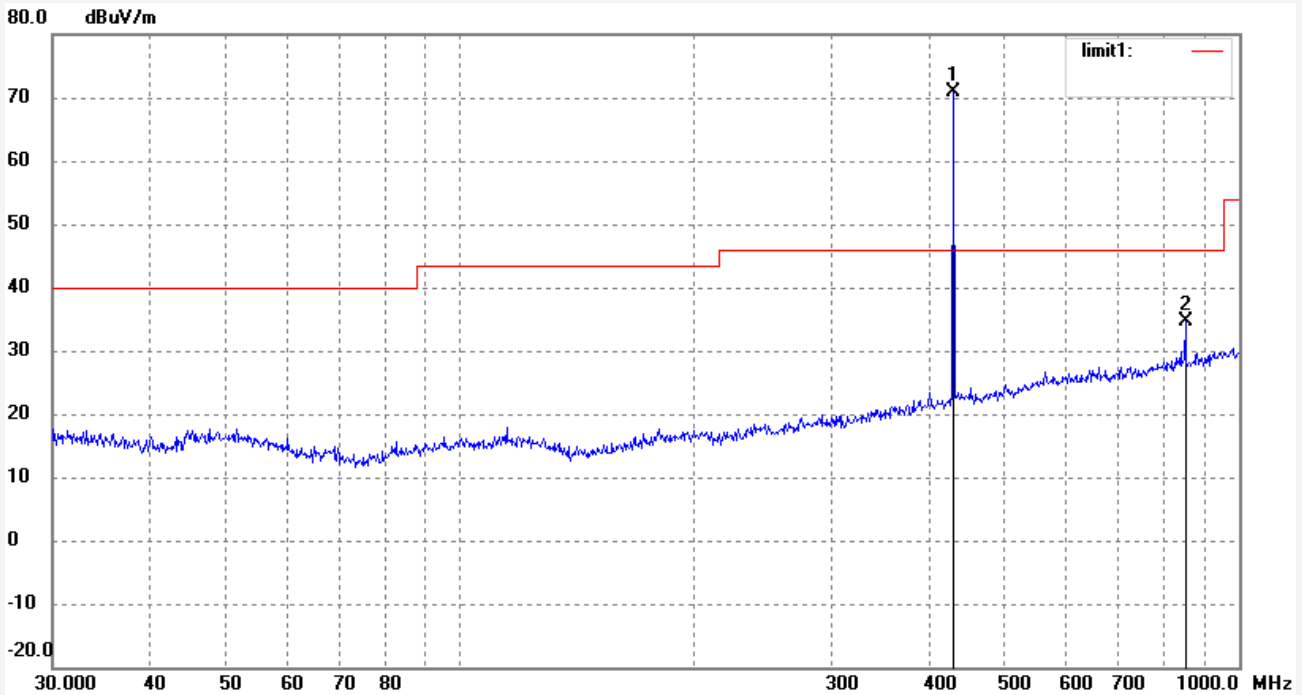

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.3052	76.84	-6.03	70.81	46.00	24.81	peak			
2	868.7545	33.94	0.74	34.68	46.00	-11.32	peak			



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #95  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: RFM69CW-433S2(0dBm)  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3V  
Date: 2013/11/18  
Time: 14:34:12  
Engineer Signature: PEI  
Distance: 3m

Note:

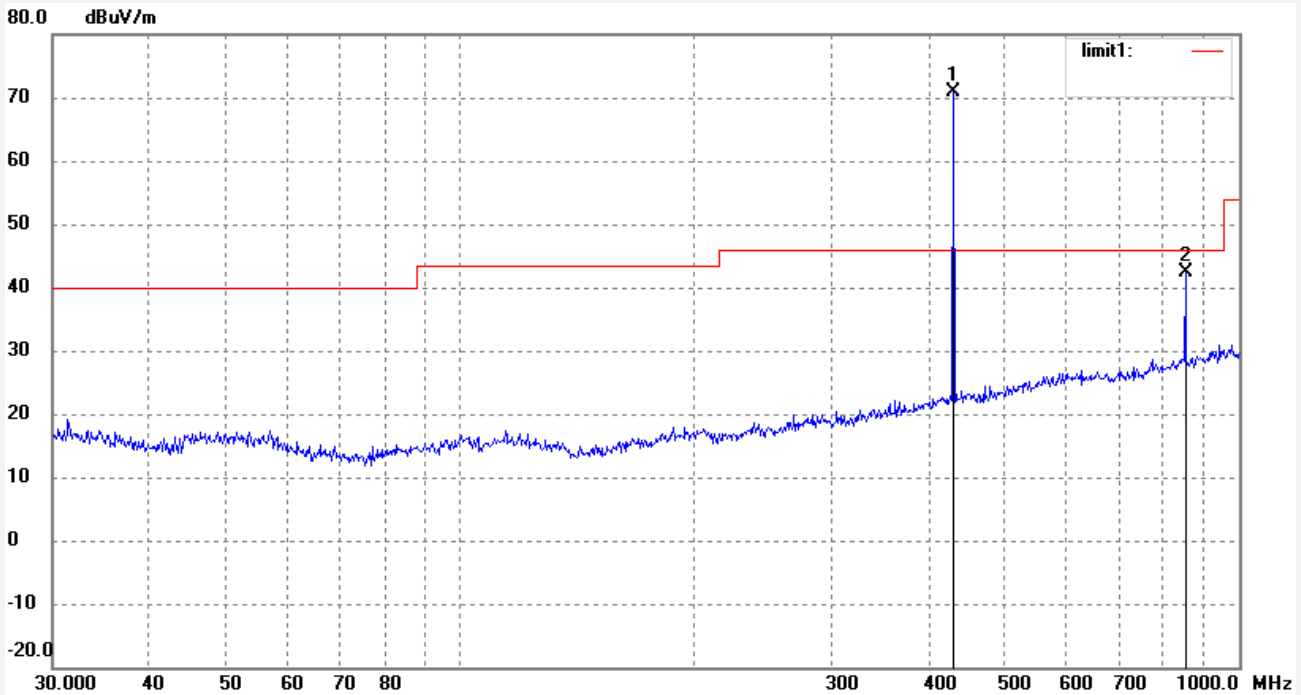

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.3052	76.97	-6.03	70.94	46.00	24.94	peak			
2	868.7546	41.52	0.74	42.26	46.00	-3.74	peak			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #164	Polarization: Horizontal
Standard: FCC PK	Power Source: DC 3V
Test item: Radiation Test	Date: 2013/11/18
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 17:33:19
EUT:	Engineer Signature: PEI
Mode: TX 433MHz	Distance: 3m
Model: RFM69CW-433S2(0dBm)	
Manufacturer:	

Note:

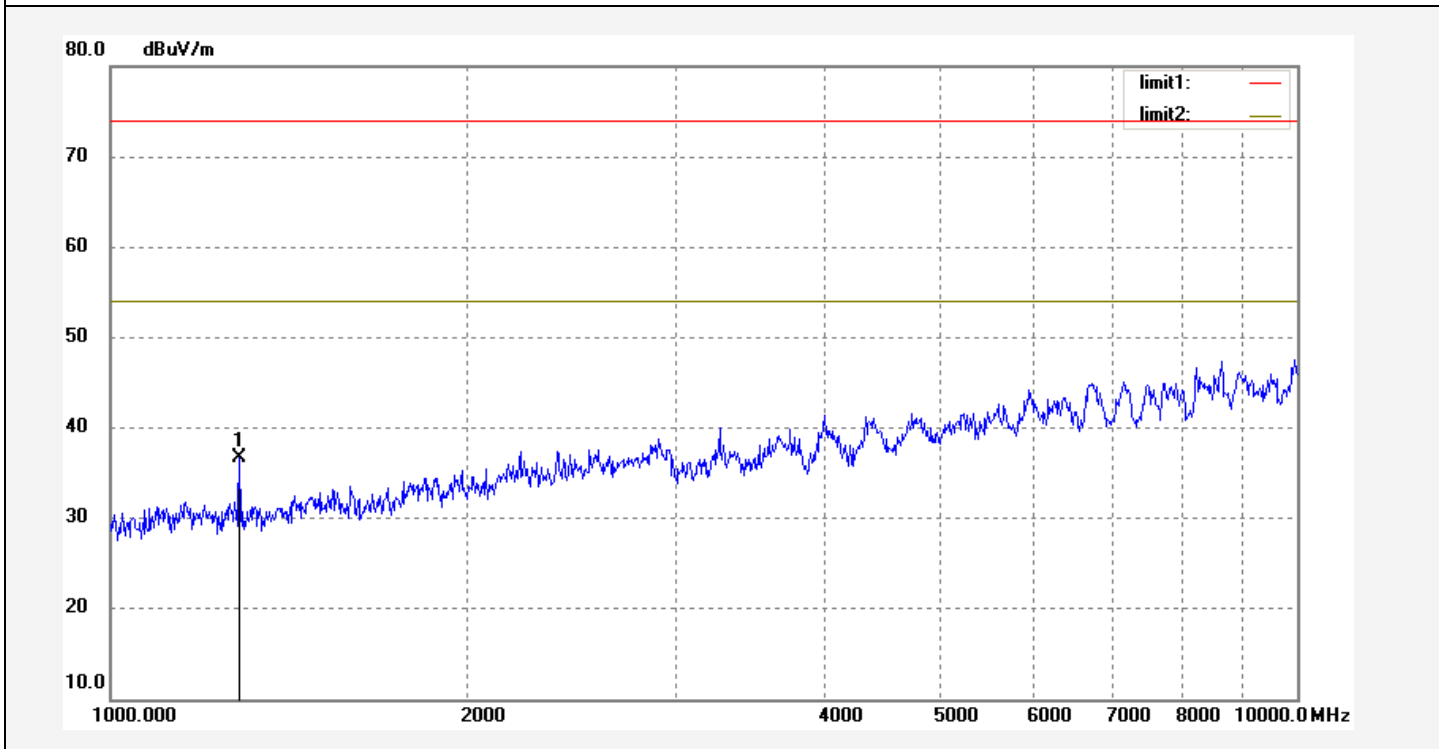

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1299.000	31.56	5.05	36.61	74.00	-37.39	peak			



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #165  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: RFM69CW-433S2(0dBm)  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3V  
Date: 2013/11/18  
Time: 17:34:38  
Engineer Signature: PEI  
Distance: 3m

Note:

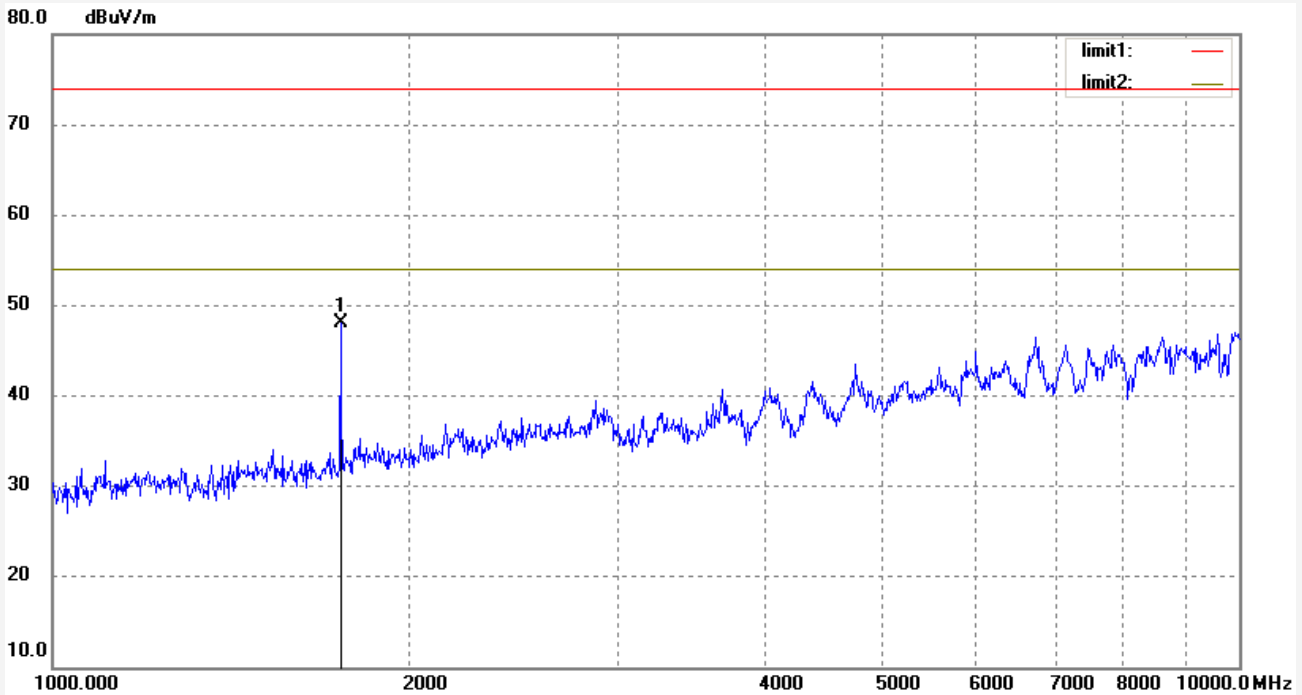

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1732.000	13.86	34.13	47.99	74.00	-26.01	peak			