



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #33
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: HM-TRP-433S (0dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3V
Date: 13/11/14/
Time: 15/39/36
Engineer Signature: PEI
Distance: 3m

Note:

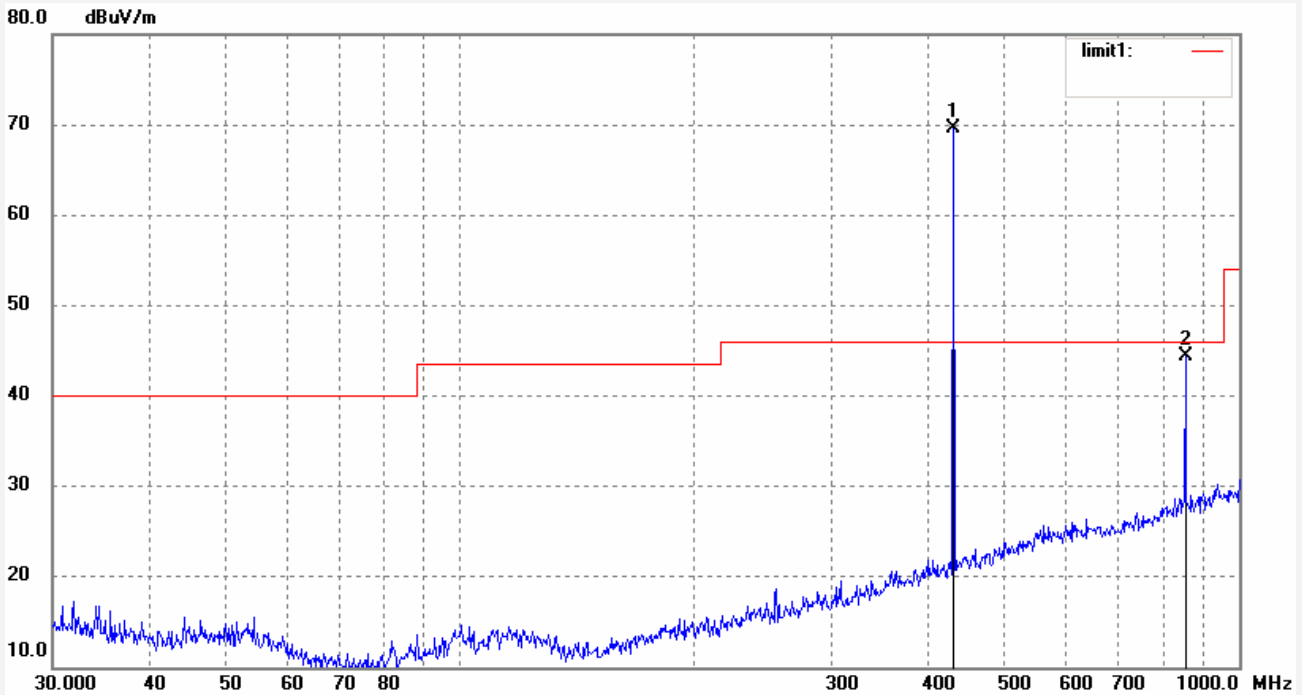

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	430.3052	75.64	-6.03	69.61	46.00	23.61	peak			
2	853.7547	43.66	0.74	44.40	46.00	-1.60	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #75
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: HM-TRP-433S(0dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3V
Date: 13/11/14/
Time: 18/03/19
Engineer Signature: PEI
Distance: 3m

Note:

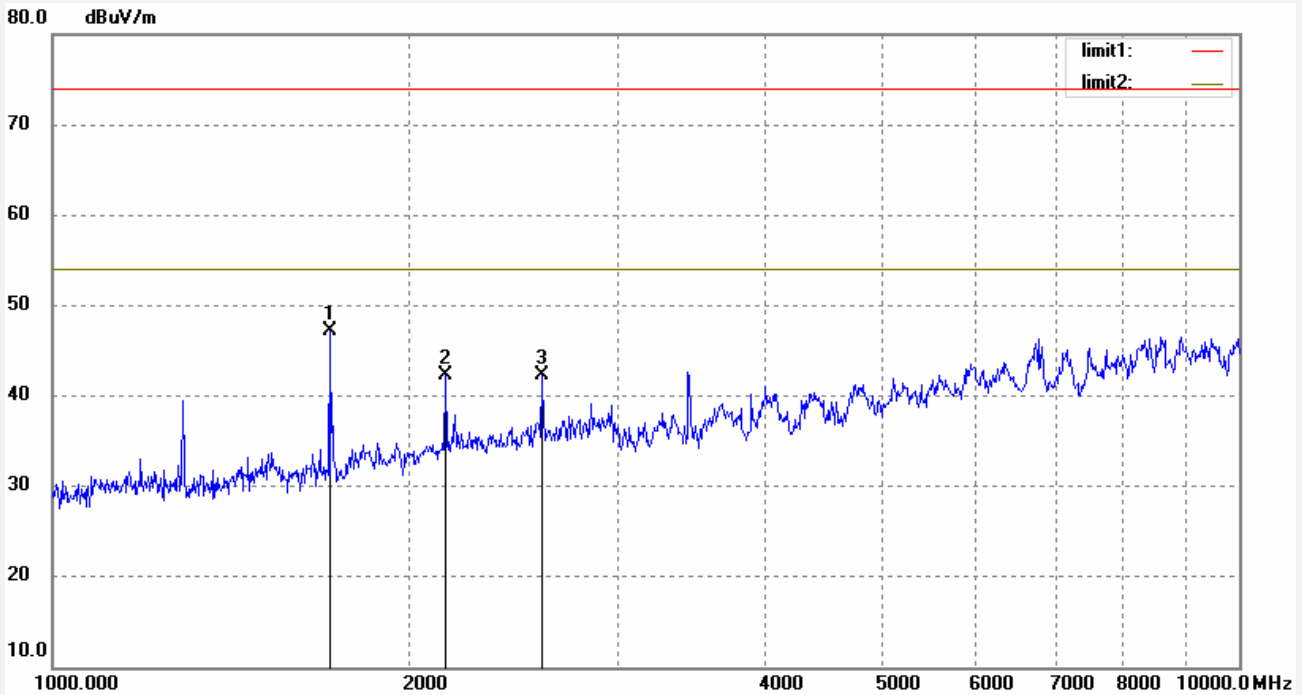

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1712.519	57.57	-10.32	47.25	74.00	-26.75	peak			
2	2144.466	50.70	-8.50	42.20	74.00	-31.80	peak			
3	2587.559	49.00	-6.77	42.23	74.00	-31.77	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #34
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: HM-TRP-433S (0dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3V
Date: 13/11/14/
Time: 15/40/41
Engineer Signature: PEI
Distance: 3m

Note:

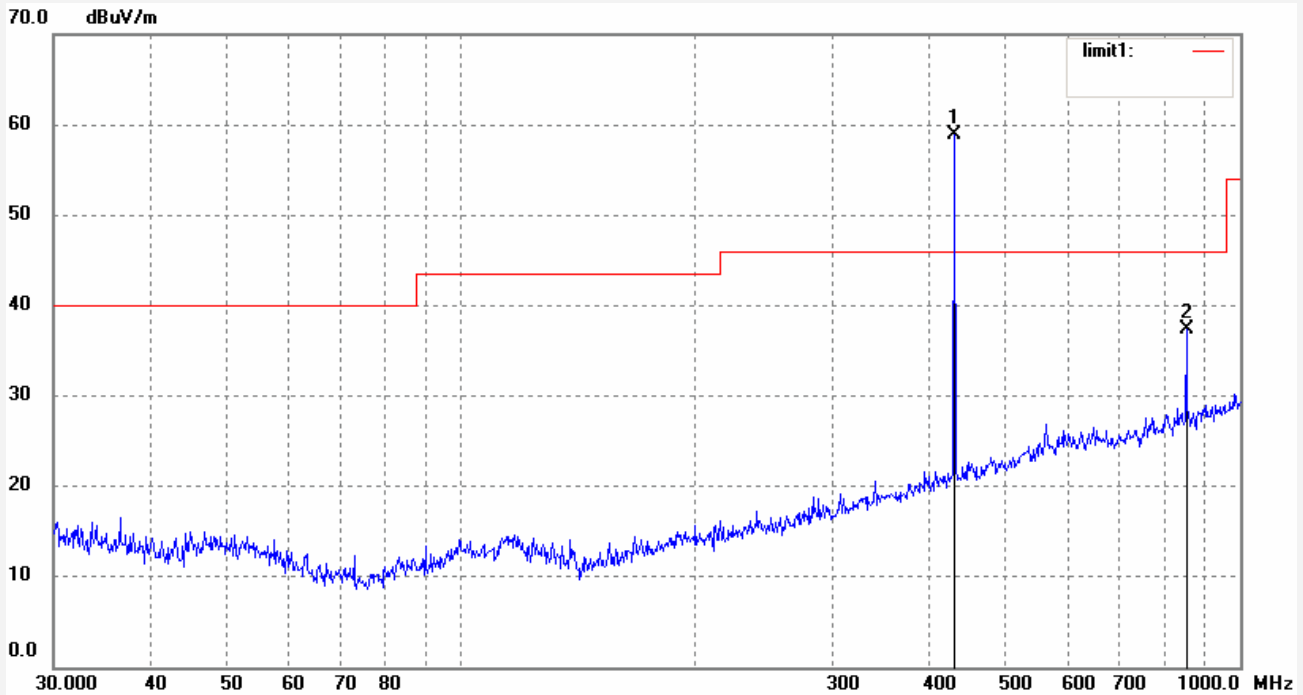

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	430.3053	64.97	-6.03	58.94	46.00	12.94	peak			
2	853.7547	36.63	0.74	37.37	46.00	-8.63	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #76
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: HM-TRP-433S(0dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3V
Date: 13/11/14/
Time: 18/05/04
Engineer Signature: PEI
Distance: 3m

Note:

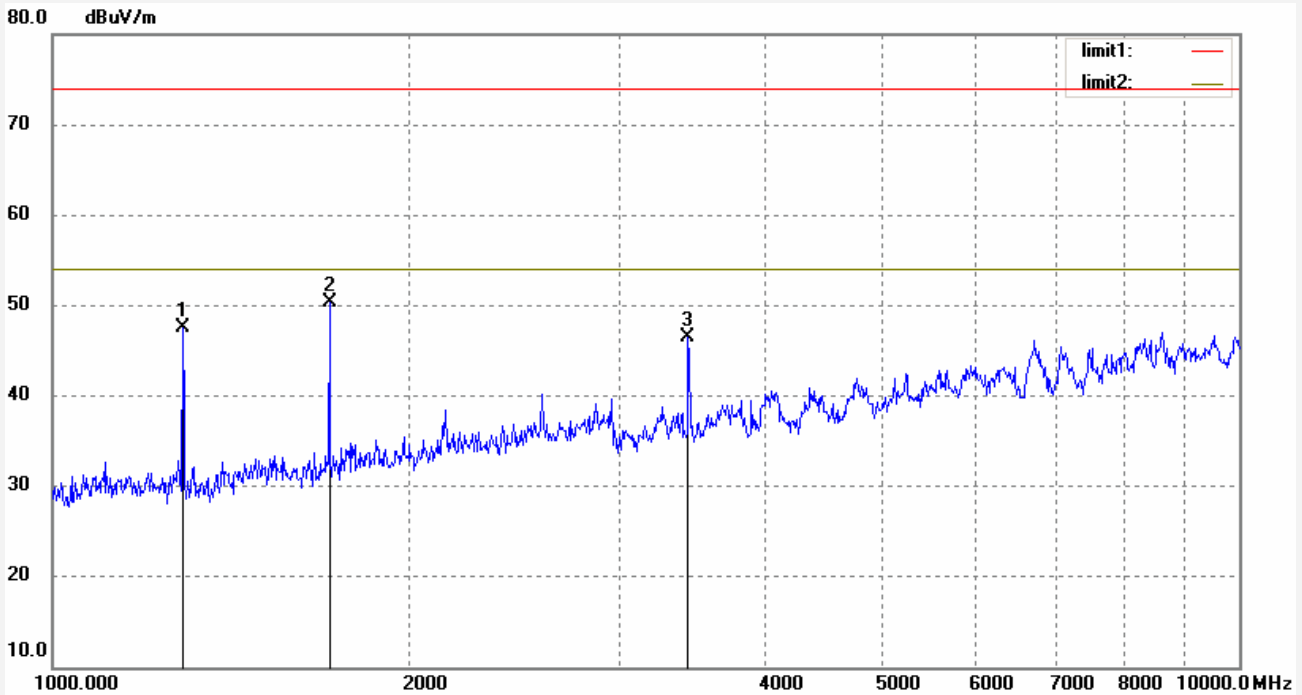

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1287.563	59.81	-12.22	47.59	74.00	-26.41	peak			
2	1712.519	60.68	-10.32	50.36	74.00	-23.64	peak			
3	3433.604	50.02	-3.57	46.45	74.00	-27.55	peak			