



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #31  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: HM-TRP-433S(10dBm)  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3V  
Date: 13/11/14/  
Time: 15/32/49  
Engineer Signature: PEI  
Distance: 3m

Note:

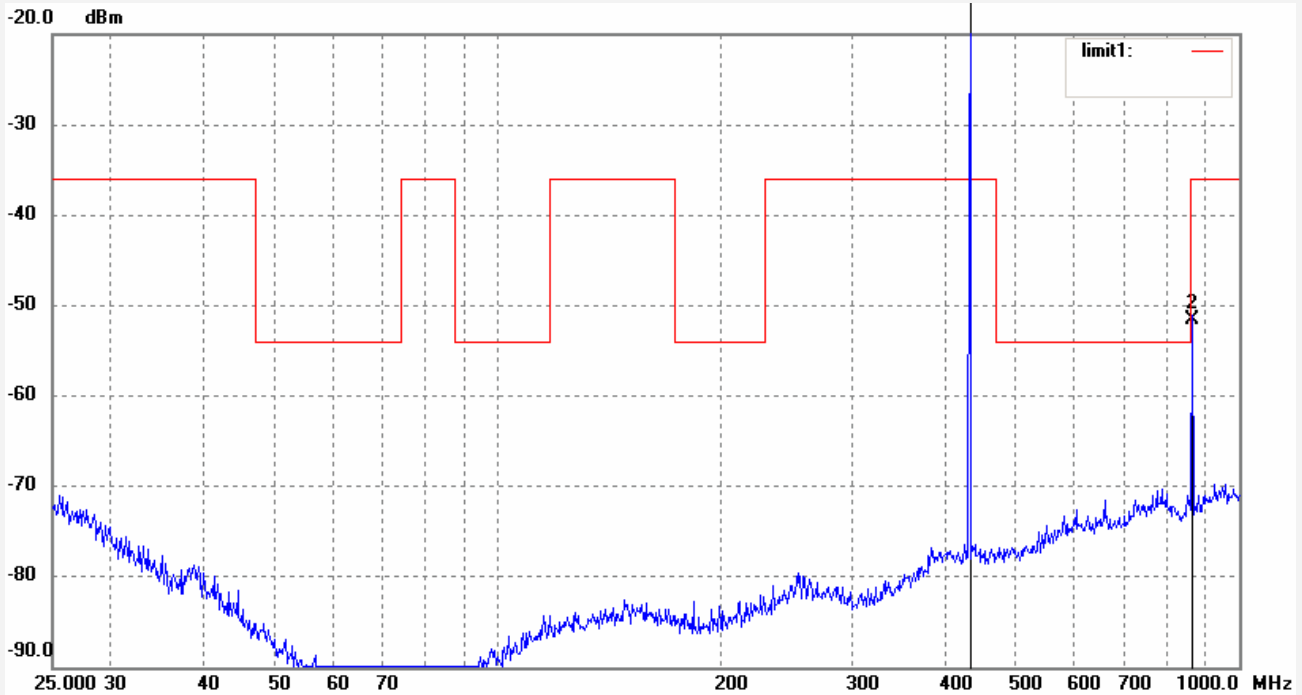

| No. | Freq. (MHz) | Reading (dBm) | Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|---------------|-------------|--------------|-------------|-------------|----------|-------------|---------------|--------|
| 1   | 433.7194    | -0.90         | 3.00        | 2.10         | -36.00      | 38.10       | peak     |             |               |        |
| 2   | 867.8300    | -59.63        | 8.10        | -51.53       | -36.00      | -15.53      | peak     |             |               |        |



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #73  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: HM-TRP-433S(10dBm)  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3V  
Date: 13/11/14/  
Time: 17/58/39  
Engineer Signature: PEI  
Distance: 3m

Note:

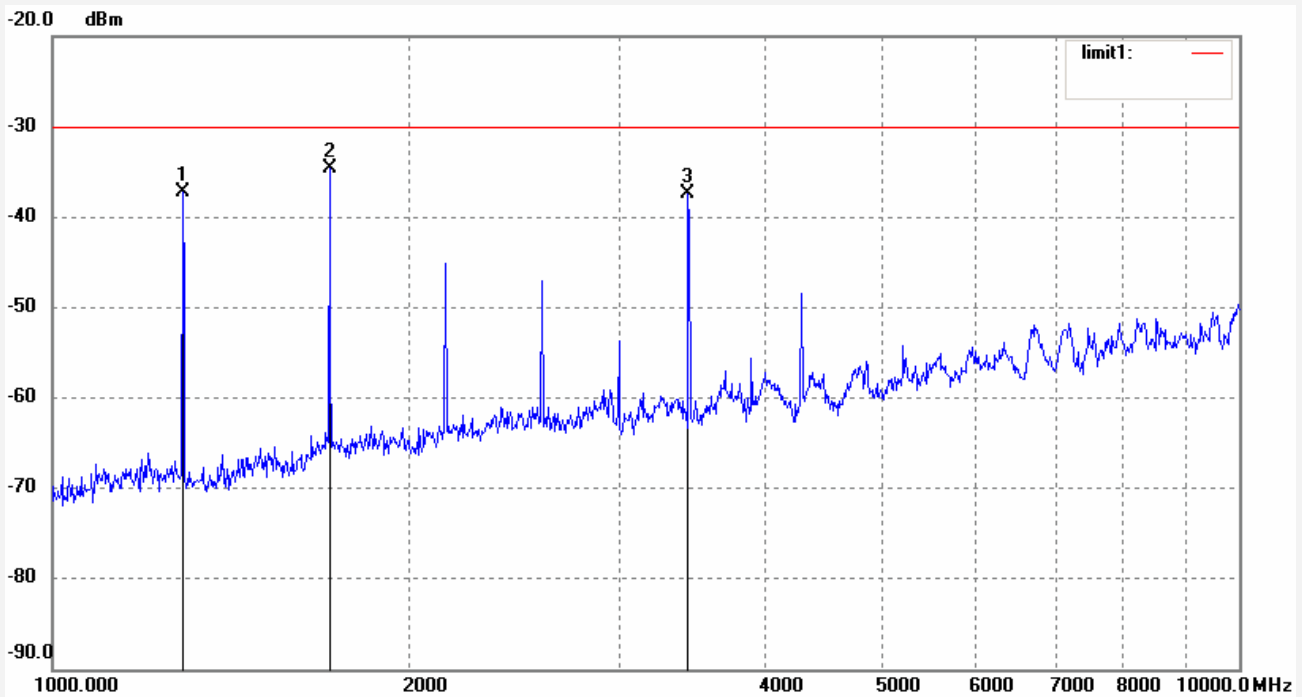

| No. | Freq. (MHz) | Reading (dBm) | Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|---------------|-------------|--------------|-------------|-------------|----------|-------------|---------------|--------|
| 1   | 1287.563    | -33.97        | -3.34       | -37.31       | -30.00      | -7.31       | peak     |             |               |        |
| 2   | 1712.519    | -35.39        | 0.76        | -34.63       | -30.00      | -4.63       | peak     |             |               |        |
| 3   | 3433.604    | -43.14        | 5.73        | -37.41       | -30.00      | -7.41       | peak     |             |               |        |



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #32  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: HM-TRP-433S-(10dBm)  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3V  
Date: 13/11/14/  
Time: 15/34/58  
Engineer Signature: PEI  
Distance: 3m

Note:

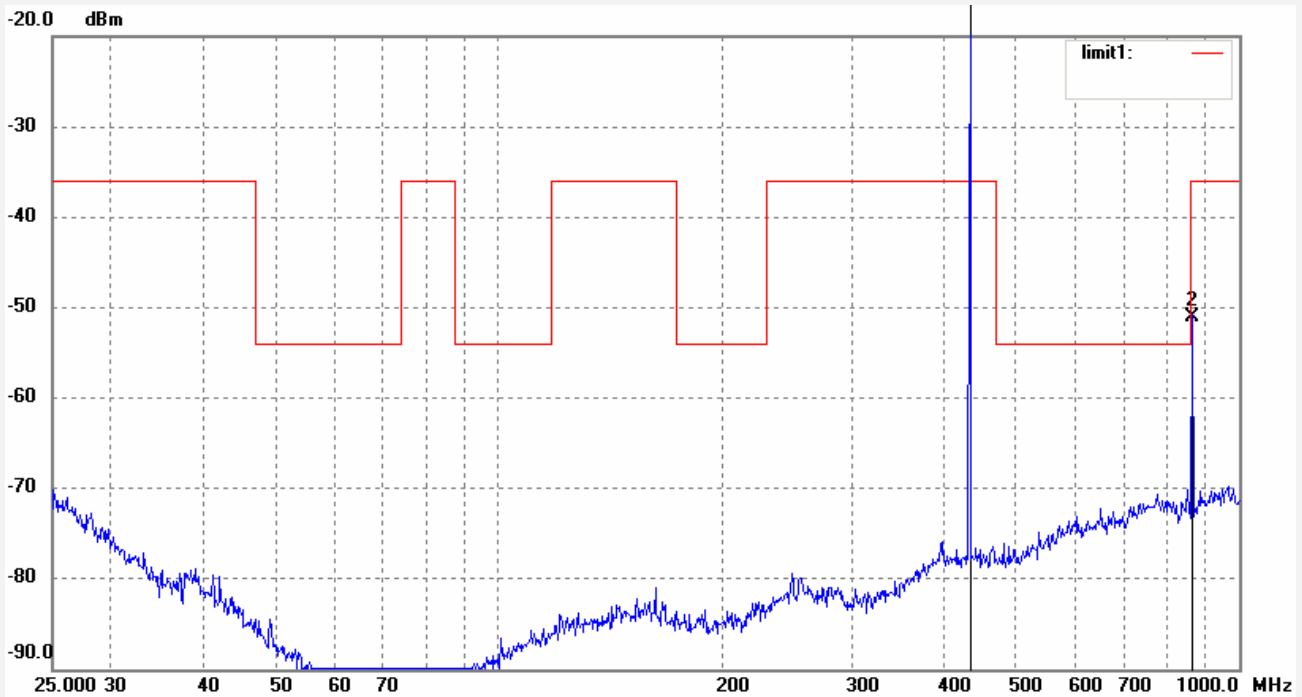

| No. | Freq. (MHz) | Reading (dBm) | Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|---------------|-------------|--------------|-------------|-------------|----------|-------------|---------------|--------|
| 1   | 433.7194    | -3.59         | 2.16        | -1.43        | -36.00      | 34.57       | peak     |             |               |        |
| 2   | 867.8300    | -59.09        | 8.02        | -51.07       | -36.00      | -15.07      | peak     |             |               |        |



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #74  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: HM-TRP-433S(10dBm)  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3V  
Date: 13/11/14/  
Time: 18/00/38  
Engineer Signature: PEI  
Distance: 3m

Note:

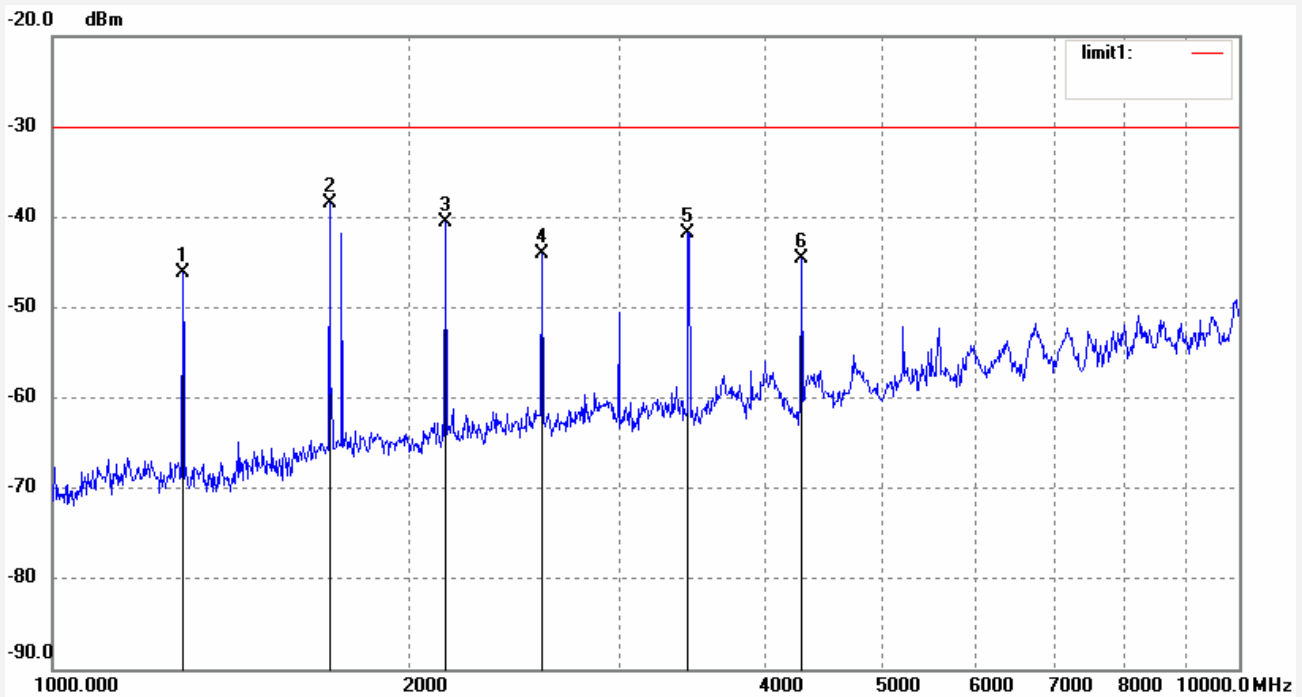

| No. | Freq. (MHz) | Reading (dBm) | Factor (dB) | Result (dBm) | Limit (dBm) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|---------------|-------------|--------------|-------------|-------------|----------|-------------|---------------|--------|
| 1   | 1287.563    | -42.83        | -3.34       | -46.17       | -30.00      | -16.17      | peak     |             |               |        |
| 2   | 1712.519    | -39.14        | 0.76        | -38.38       | -30.00      | -8.38       | peak     |             |               |        |
| 3   | 2144.466    | -41.26        | 0.72        | -40.54       | -30.00      | -10.54      | peak     |             |               |        |
| 4   | 2587.559    | -46.26        | 2.15        | -44.11       | -30.00      | -14.11      | peak     |             |               |        |
| 5   | 3433.604    | -47.43        | 5.73        | -41.70       | -30.00      | -11.70      | peak     |             |               |        |
| 6   | 4279.765    | -51.86        | 7.30        | -44.56       | -30.00      | -14.56      | peak     |             |               |        |