



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #77
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 868MHz
Model: HM-TRP-868S(10dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3V
Date: 13/11/14/
Time: 18/10/13
Engineer Signature: PEI
Distance: 3m

Note:

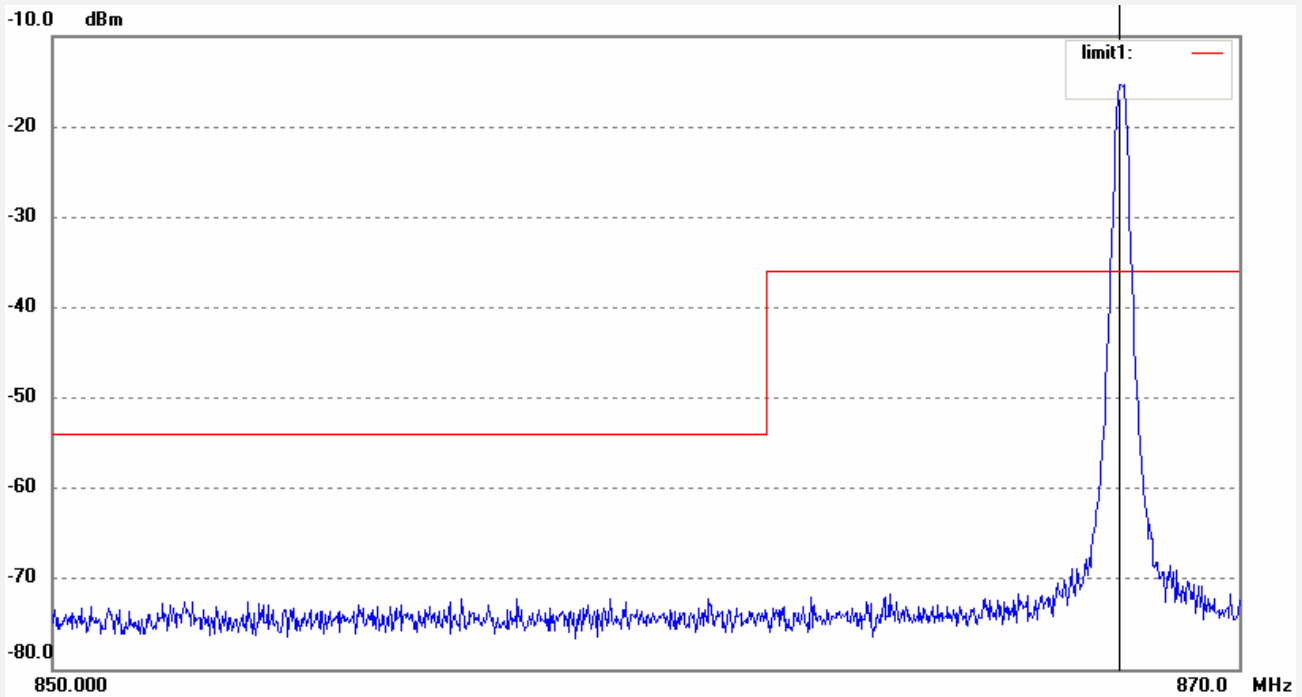

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	867.9750	-3.39	8.11	4.72	-36.00	40.72	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #42
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 868MHz
Model: HM-TRP-868S(10dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3V
Date: 13/11/14/
Time: 16/03/08
Engineer Signature: PEI
Distance: 3m

Note: -2

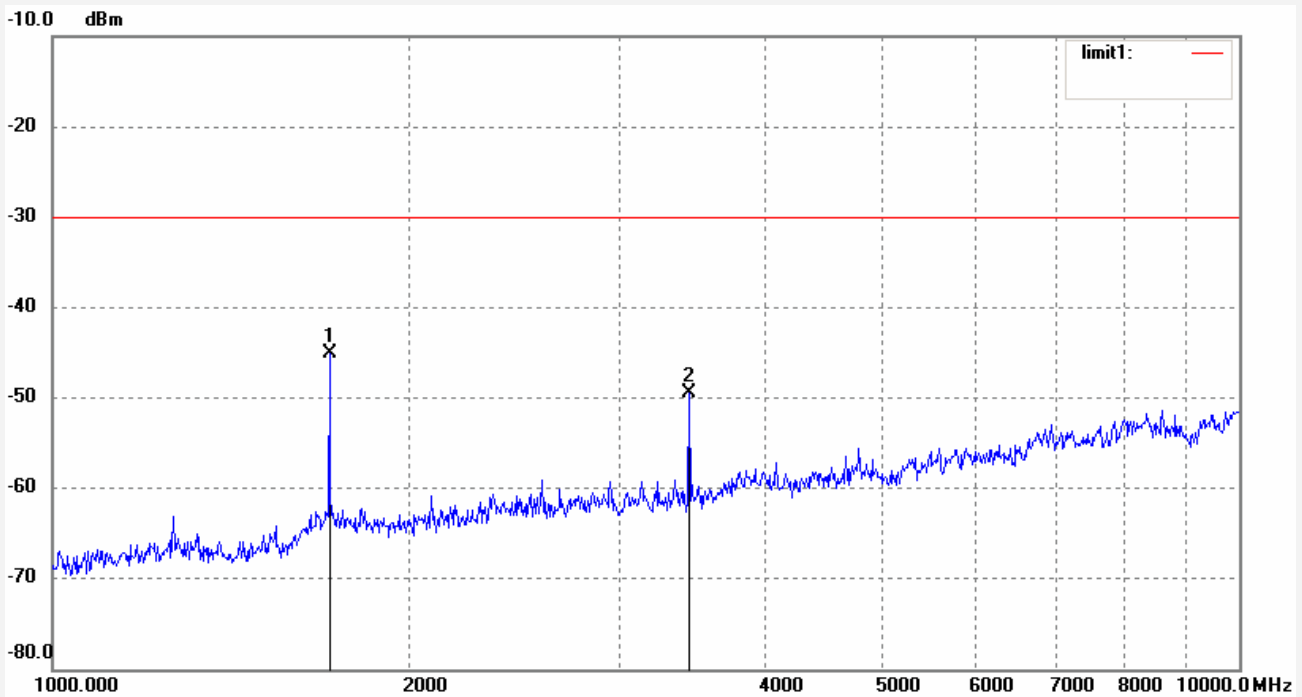

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1712.519	-45.87	0.76	-45.11	-30.00	-15.11	peak			
2	3441.575	-55.17	5.76	-49.41	-30.00	-19.41	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #78
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 868MHz
Model: HM-TRP-868S(10dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3V
Date: 13/11/14/
Time: 18/11/30
Engineer Signature: PEI
Distance: 3m

Note:

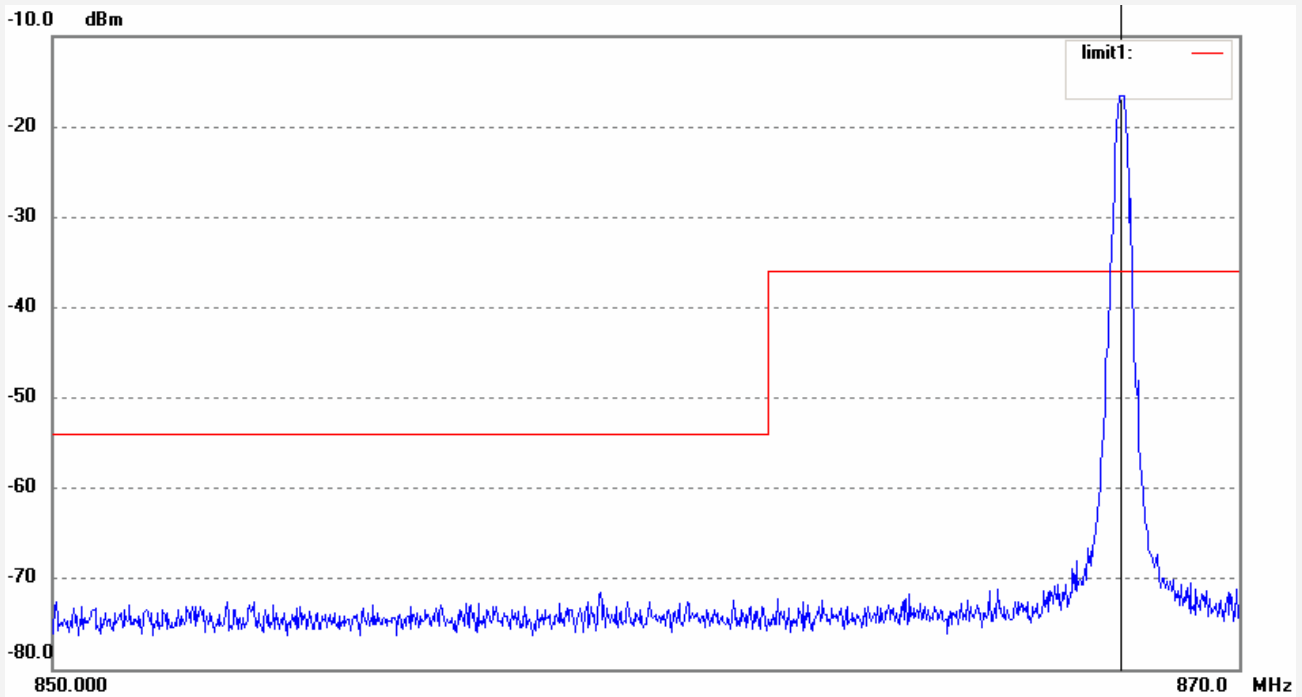

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	867.9952	-4.57	8.02	3.45	-36.00	39.45	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: hp #43
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 868MHz
Model: HM-TRP-868S(10dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3V
Date: 13/11/14/
Time: 16/09/57
Engineer Signature: PEI
Distance: 3m

Note: -2

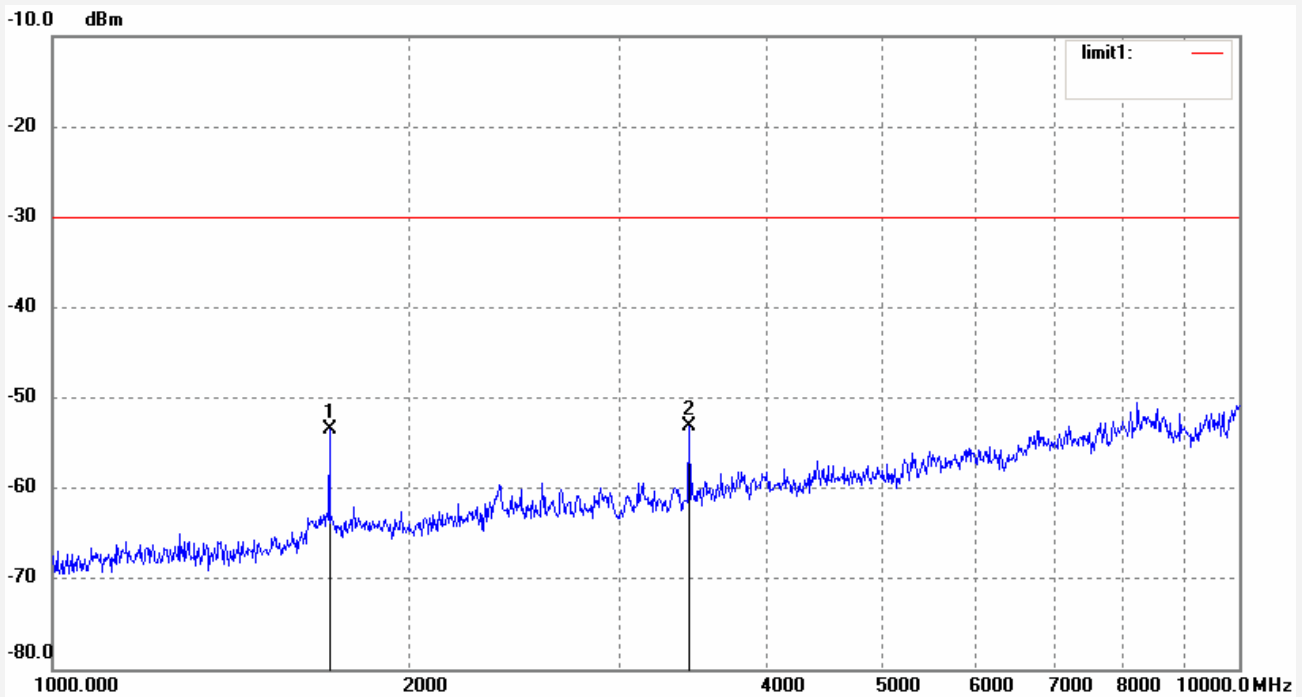

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1712.519	-54.23	0.76	-53.47	-30.00	-23.47	peak			
2	3441.575	-58.95	5.76	-53.19	-30.00	-23.19	peak			