



Condition : EN300220 433MHZ TRAN 3m HORIZONTAL
 EUT/Model : RFM23-434
 Job No. :
 Test Mode :

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Preamp Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
432.550	16.56	10.38	0.00	-22.55	4.39	-36.00	40.39
866.140	22.78	10.73	0.00	-90.85	-57.35	-36.00	-21.35

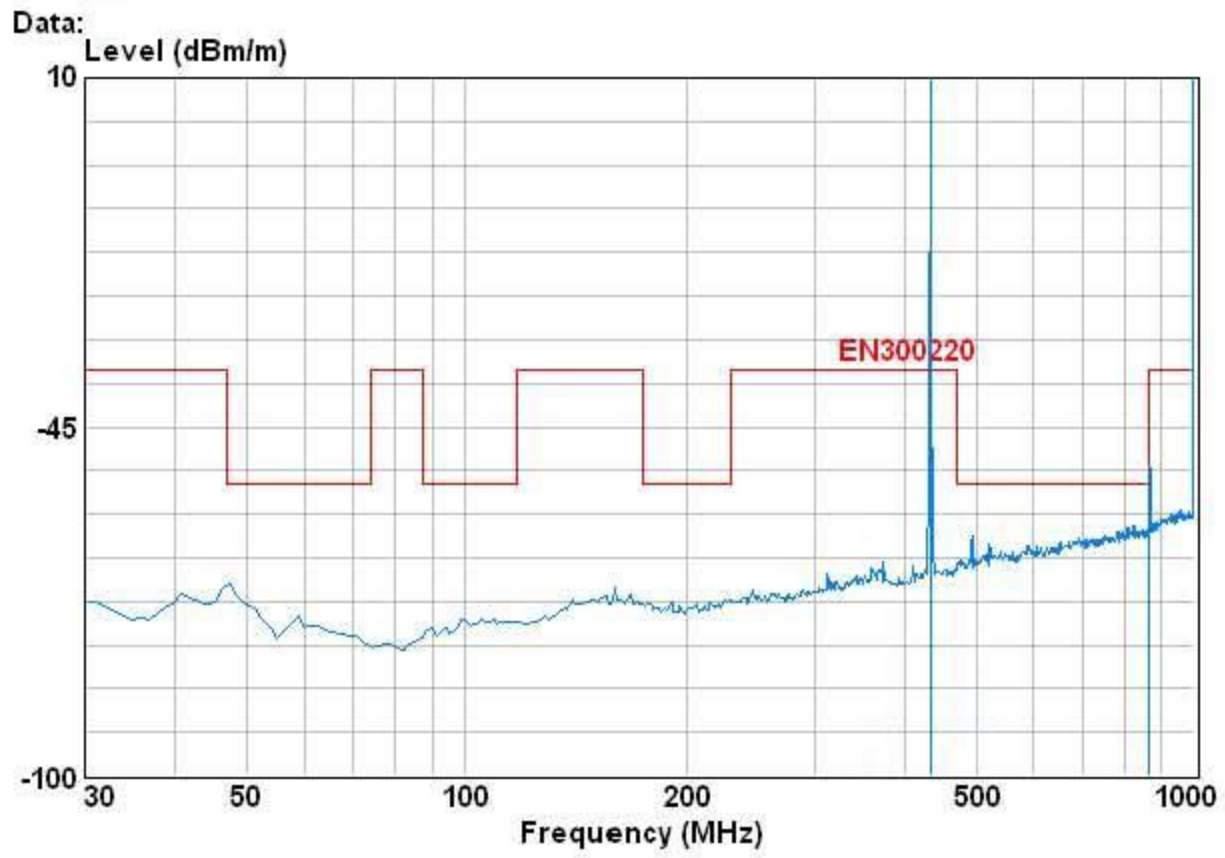


Condition : EN300220 433MHZ TRAN 3m VERTICAL
 EUT/Model : RFM23-434
 Job No. :
 Test Mode :

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Preamp Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
432.550	16.56	10.38	0.00	-16.34	10.60	-36.00	46.60
866.140	22.78	10.73	0.00	-84.69	-51.19	-36.00	-15.19

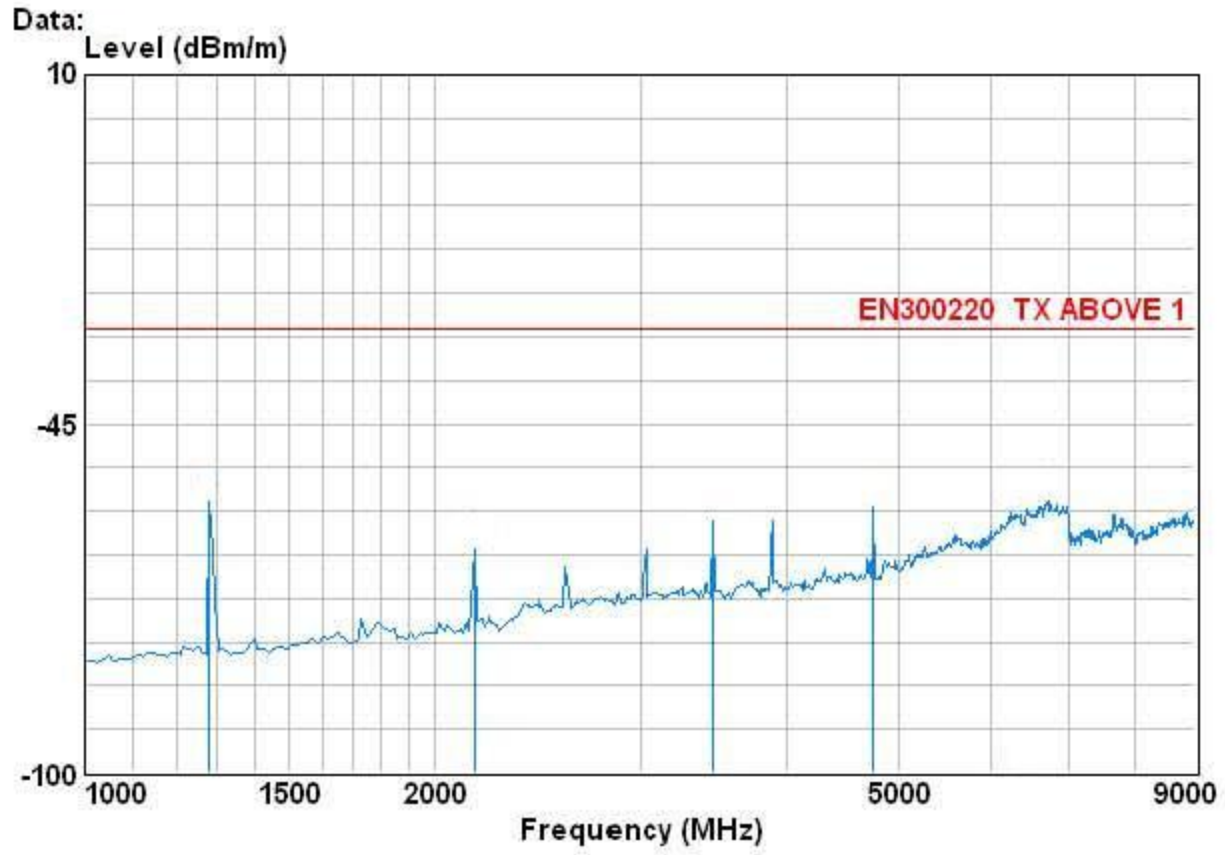

Condition : EN300220 TX ABOVE 1 3m ANT3117 (>1G) o1 HORIZONTAL
 EUT/Model : RFM23-434
 Job No. :
 Test Mode :

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Preamplifier Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
1280.000	26.37	4.50	39.48	-48.39	-57.01	-30.00	-27.01
2168.000	29.18	5.52	38.93	-60.60	-64.84	-30.00	-34.84
3456.000	32.49	7.25	39.54	-60.47	-60.27	-30.00	-30.27
4760.000	34.19	9.64	41.45	-60.39	-58.02	-30.00	-28.02

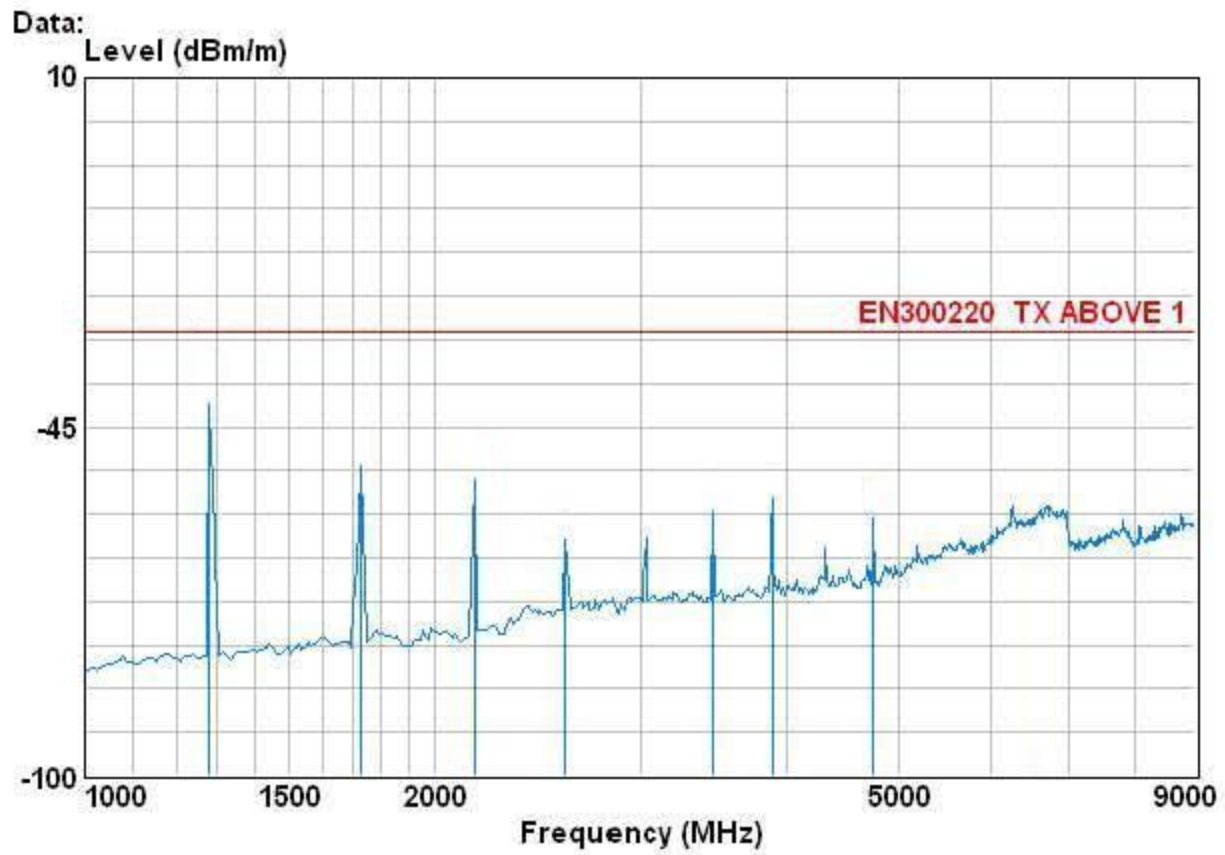

Condition : EN300220 TX ABOVE 1 3m ANT3117 (>1G) o1 VERTICAL
 EUT/Model : RFM23-434
 Job No. :
 Test Mode :

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Preamp Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
1280.000	26.37	4.50	39.48	-29.86	-38.47	-30.00	-8.47
1728.000	27.80	5.21	39.65	-44.43	-51.07	-30.00	-21.07
2168.000	29.18	5.52	38.93	-49.02	-53.26	-30.00	-23.26
2592.000	30.69	6.06	38.99	-60.61	-62.86	-30.00	-32.86
3456.000	32.49	7.25	39.54	-58.44	-58.24	-30.00	-28.24
3896.000	32.99	7.89	39.76	-57.32	-56.20	-30.00	-26.20
4760.000	34.19	9.64	41.45	-61.67	-59.29	-30.00	-29.29