



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #44  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 915MHz  
Model: HM-TRP-915S(20dBm)  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3V  
Date: 13/11/14/  
Time: 16/18/15  
Engineer Signature: PEI  
Distance: 3m

Note:

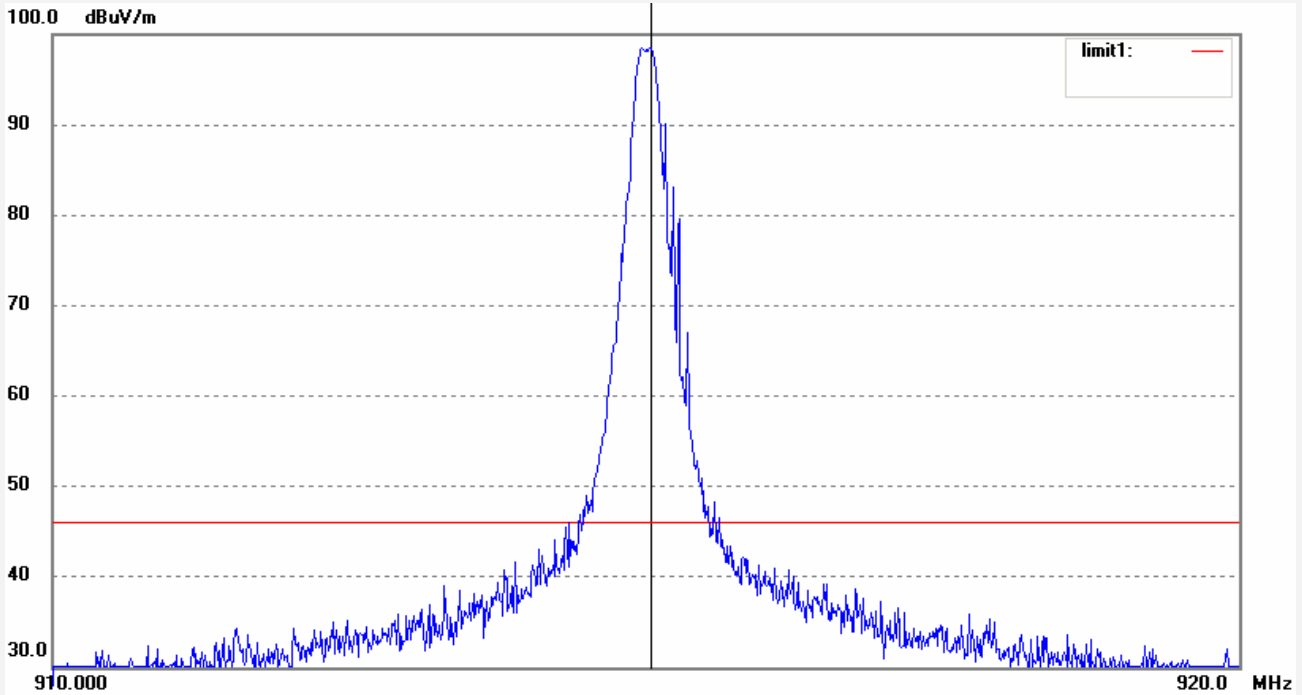

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	915.0264	117.09	1.46	118.55	46.00	72.55	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #48  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 915MHz  
Model: HM-TRP-915S(20dBm)  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3V  
Date: 13/11/14/  
Time: 16/24/54  
Engineer Signature: PEI  
Distance: 3m

Note:

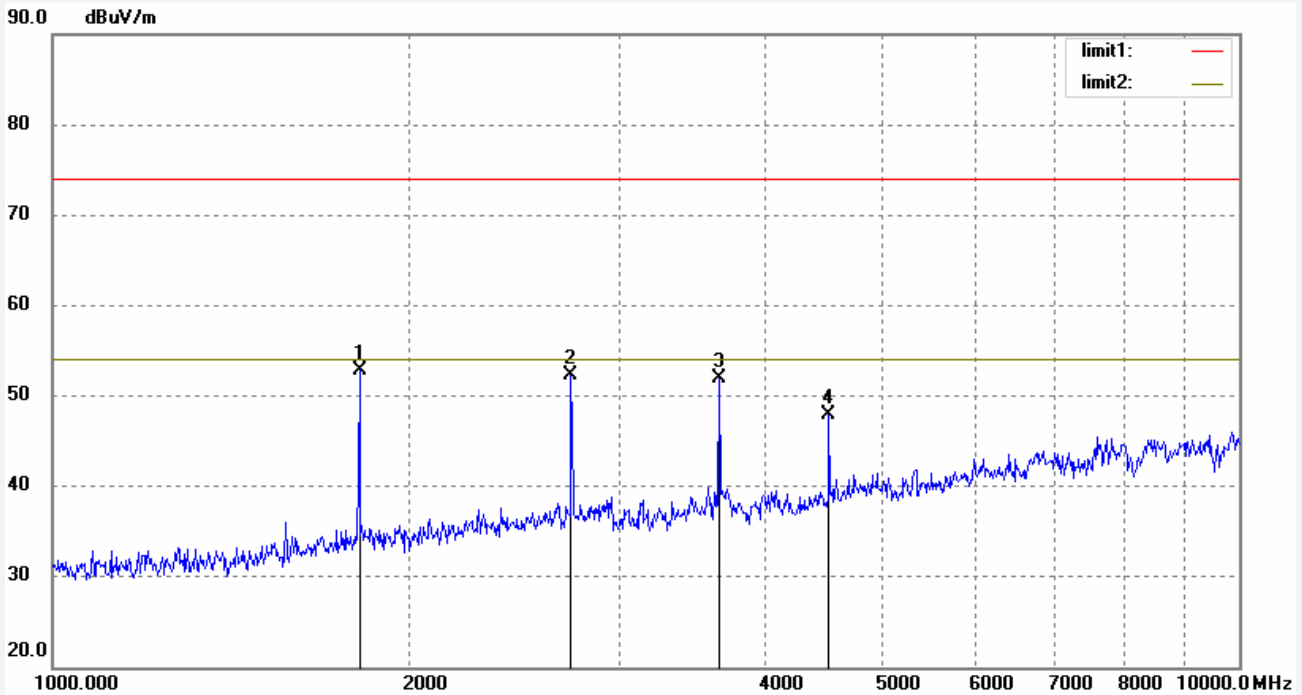

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1814.728	62.70	-9.89	52.81	74.00	-21.19	peak			
2	2735.643	58.45	-6.17	52.28	74.00	-21.72	peak			
3	3646.981	54.62	-2.61	52.01	74.00	-21.99	peak			
4	4514.213	49.27	-1.28	47.99	74.00	-26.01	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #45  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 915MHz  
Model: HM-TRP-915S(20dBm)  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3V  
Date: 13/11/14/  
Time: 16/19/36  
Engineer Signature: PEI  
Distance: 3m

Note:

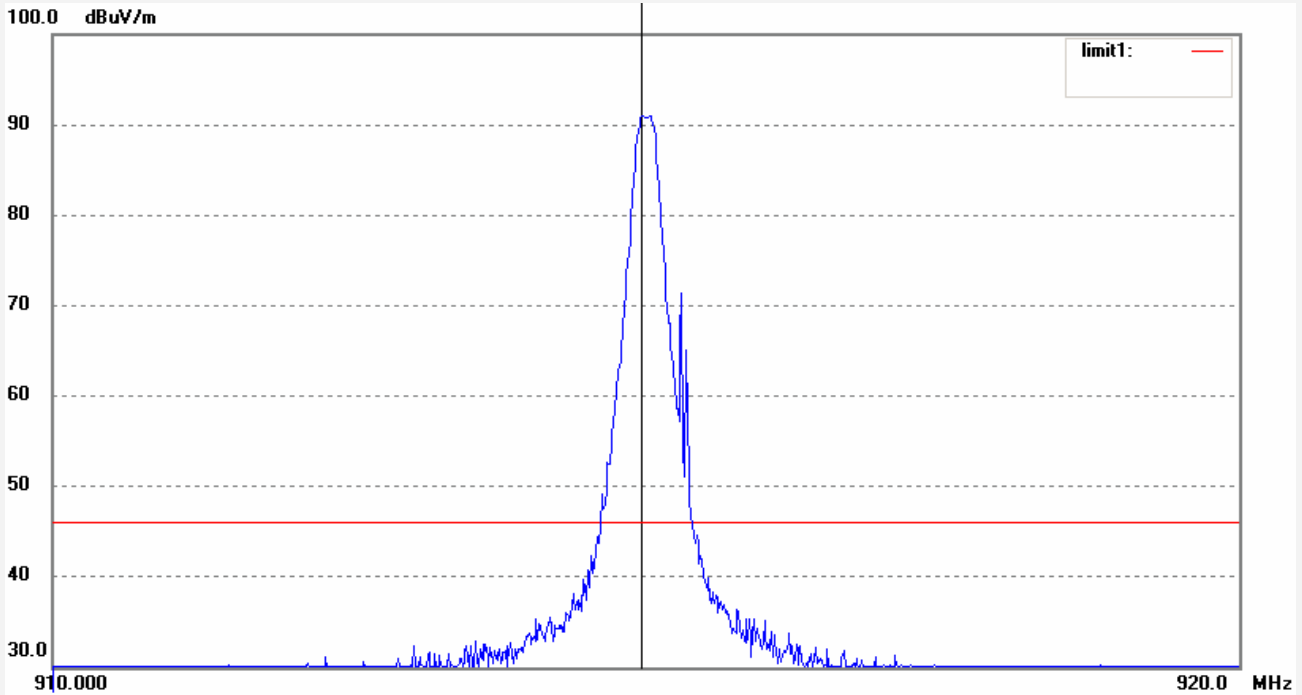

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	914.9563	109.53	1.46	110.99	46.00	64.99	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #49  
Standard: FCC PK  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 915MHz  
Model: HM-TRP-915S(20dBm)  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3V  
Date: 13/11/14/  
Time: 16/26/52  
Engineer Signature: PEI  
Distance: 3m

Note:

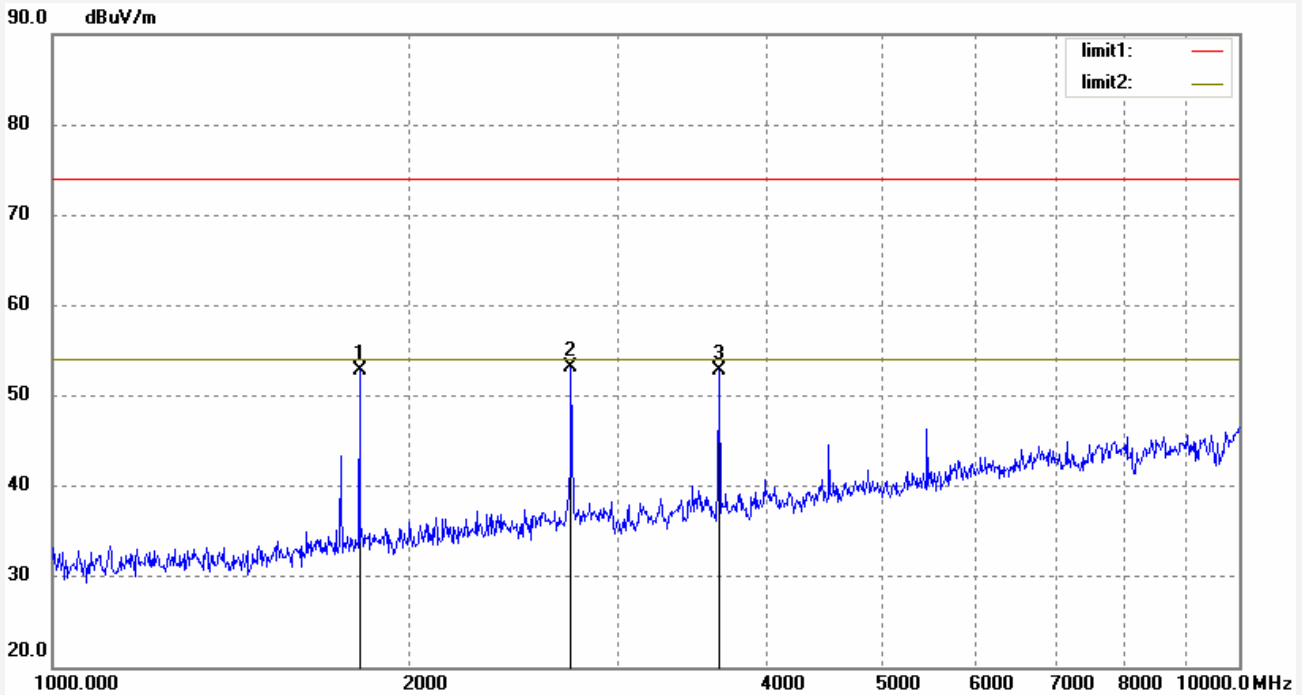

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1814.728	62.72	-9.89	52.83	74.00	-21.17	peak			
2	2735.643	59.36	-6.17	53.19	74.00	-20.81	peak			
3	3646.981	55.44	-2.61	52.83	74.00	-21.17	peak			